

EE2S11 SIGNALS AND SYSTEMS

Part 1, 13 December 2018, 13:30 - 15:30

Closed book; two sides of one A4 page with handwritten notes permitted. Graphic calculators not permitted.

This exam has four questions (38 points)

Question 1 (10 points)

Evaluate the following integrals:

a)
$$\int_{t=-4}^4 t^2 [\delta(t+2) + \delta(t) + \delta(t-5)] dt$$

b)
$$\int_{t=-4}^4 (t^2 + 2) [\delta(t) + 3\delta(t-2)] dt$$

c)
$$\int_{t=-4}^4 t^2 \delta'(t-2) dt$$

The signal $y(t)$ satisfies the differential equation

$$4y'(t) + 8y(t) = 12\delta(t), \quad \text{with } y(0^-) = 0.$$

d) Determine $y(0^+)$.

e) Find a signal $z(t)$ such that $z(t) = 0$ for $t < 0$ and $z'(t) = 12\delta(t) - 24e^{-2t}u(t)$.

Question 2 (8 points)

The action of an LTI system with an input signal $x(t)$ and output signal $y(t)$ is described by the differential equation

$$y''(t) + 4y'(t) + 13y(t) = x(t) \quad \text{for } t > 0^-$$

with initial conditions $y(0^-) = 4$ and $y'(0^-) = 4$.

a) Determine the impulse response $h(t)$ of the system.


The zero-input response $y_{zi}(t)$ of the system can be written as

$$y_{zi}(t) = Ae^{-\alpha t} \cos(\omega t + \varphi)u(t).$$

b) Determine A , α , ω , and φ .

Question 3 (10 points)

Consider the real-valued continuous-time periodic signal $x(t)$ depicted below:

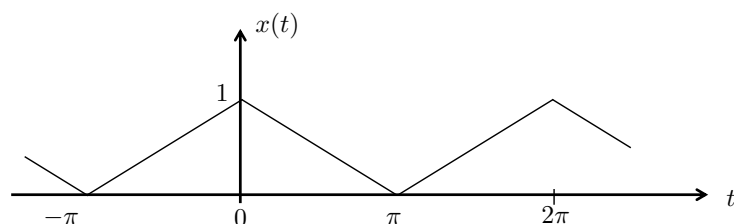

The Fourier series expansion of $x(t)$ is given by

$$x(t) = \sum_{k=-\infty}^{\infty} X_k e^{jk\Omega_0 t}, \quad t \in [t_0, t_0 + T_0), \quad X_k = \frac{1}{T_0} \int_{t_0}^{t_0+T_0} x(t) e^{-jk\Omega_0 t} dt, \quad k \in \mathbb{Z}. \quad (1)$$


- Without explicitly computing the Fourier series, what can you say about the spectrum of $x(t)$: Is it discrete or continuous, is it real, imaginary or complex-valued, and do we have symmetry in the spectrum? Motivate your answer.
- Compute the Fourier series expansion of $x(t)$ using (1).
- Compute the Fourier coefficients using the Laplace transform.
- Give a sketch of the magnitude and phase spectrum of $x(t)$.

Assume the signal $x(t)$ is the input of an LTI system of which the output is $y(t) = \pi \frac{dx(t)}{dt}$.

- Compute the Fourier series expansion of $y(t)$.
- What is the order of decay of both spectra? Explain which one decays fastest and why.

Question 4 (10 points)

Consider the RLC circuit depicted below:

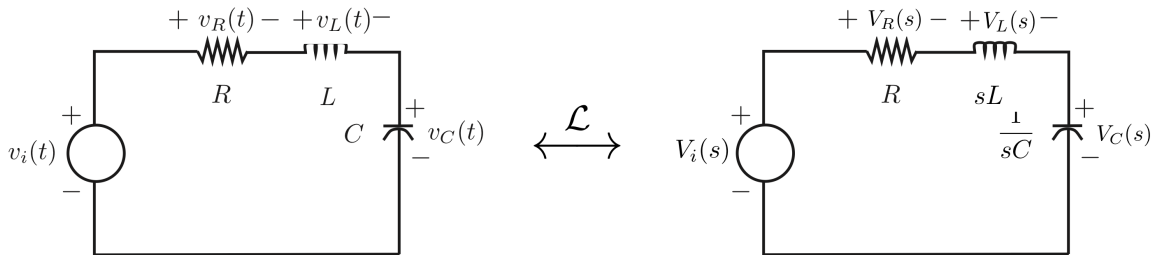

Let $H_L(s)$ denote the the transfer function of the (input) voltage source to the (output) voltage across the inductor,

$$H_L(s) = \frac{V_L(s)}{V_i(s)}, \quad s \in \text{ROC}.$$

- Give an expression for $H_L(s)$ in terms of R, L and C .

For simplicity, now assume that $R = L = C = 1$.

- Determine the poles and zeros of the system and draw them in the complex s -plane. Is the system BIBO stable? Motivate your answer.
- Give an expression for the frequency, magnitude and phase response of the system.
- Sketch the magnitude and phase response and indicate the values of $|H_L(j\Omega)|$ and $\angle H_L(j\Omega)$ for the (angular) frequencies $\Omega = 0$ and $\Omega = \pm\infty$.
- Suppose we consider the transfer to the output across the resistor or capacitor, given by $H_R(s)$ and $H_C(s)$, respectively. Argue whether the corresponding frequency responses are low-, band- or highpass. Motivate your answer by considering the pole-zero locations of the transfer functions, and indicate how they differ from the pole-zero locations of $H_L(s)$.